


**RIBBON
COMPACT
DRIVER**
LOADED

Multi Color
Option™

**DDC
Wired**

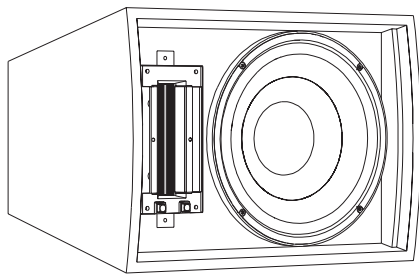

E24.

Entertainer E24

In this documentation you will find information about:

- Description
- Placement
- Maintenance
- Connection
- Options
- Dynamic Damping Control™
- Recommendation
- Technical specifications



Description

The E24 is a full-range cabinet, with single SA 1205 stiff-suspension/long excursion 12" woofer in combination with an SA 8535 Ribbon Compact Driver, recommended for applications where medium output, high quality reinforcement is needed.

Placement

Mounting of the E24 can be done in three ways. You can fly the E24 by using the small Uni-Rig flying points. You can mount it with the FRK-bracket or with an Omnimount. If you use the small flying system there must be a space of minimal 7 cm (2.7 in.) between the E24 and the wall.

(for dimensions, see back). If you don't want to use the mounting options then fill the unused holes in the E24 with the plastic caps.

Maintenance

Maintenance on the E24, especially on the drivers and filters is best left to official Stage Accompany service personnel.


Connection

The E24 has two 4-pole Speakon connectors and one spring terminal connector. Connecting can be done in two ways; with a 4-pole speakon or with the spring terminal connector (for use with loose wires). When using Speakon connectors, be sure that you use the 'Input' socket (see connectorpanel). In case you want to link several E24 cabinets to the same channel, then it is easy to link them by using the 'Link' socket.


(Caution: When linking, make sure nominal impedance stays within amplifier specification!). If you are using loose wires then be aware of the right polarity.

Options

The E24 is standard finished in SA Black Protecture, but is also available in any possible RAL color (Multi Color Option)™. Small Uni-Rig fly-points (3).

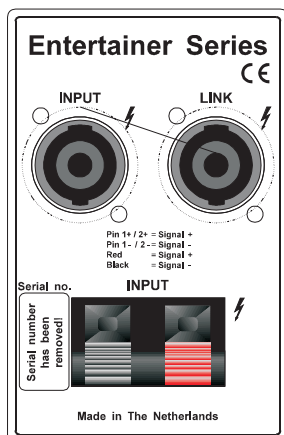

Connectorpanel of the E24 with two 4-pole Speakon connectors and spring terminal.

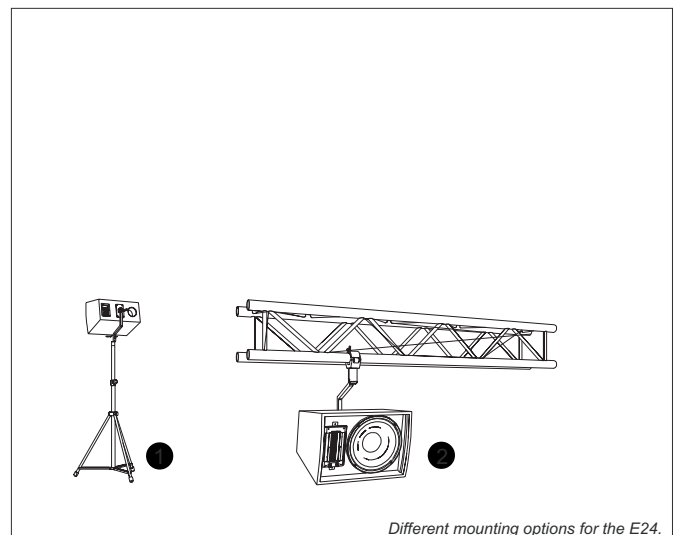


Different mounting options for the E24.

Dynamic Damping Control (DDC™)

For absolute top quality sound reproduction, the E24 is completely pre wired for Dynamic Damping Control

The DDC™ system is based on 2 loudspeaker wires that return from the speaker to the (SA) amplifier. Through these “sense wires” the amplifier can compensate the speaker cable and connector resistance, ensuring maximum control over the speaker cone movement.


DDC
Wired

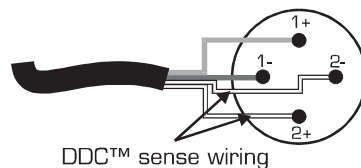

Wiring for DDC usage with a 4-pole Speakon connector.

Technical specifications

Frequency response	: 58 Hz - 30 kHz (+/- 3dB)
Drivers	: 1 x SA 1205 LF driver; 1 x SA 8535 MF/HF driver
Cross-over frequency	: 1400 Hz
Nominal impedance	: 8 Ohm
Sensitivity @ 1W/1m	: 95 dB
Max. RMS power	: 400 W
Max. Peak power	: 1000 W
SPL program/peak	: 121 dB/125 dB
Dispersion (2 kHz H x V)	: 90° x 70°
Color	: SA Black, other colors on request
Front	: Expanded metal grille + acoustic transparent cloth
Connectors	: 2 x 4-pole Speakon; 1 x Input, 1 x Link, 1 x Terminal
Physical dimensions (h x w x d)	: 360 x 495 x 354 mm (14.2 x 19.5 x 13.9 in.)
Weight	: 23,5 kg (51.8 lb)

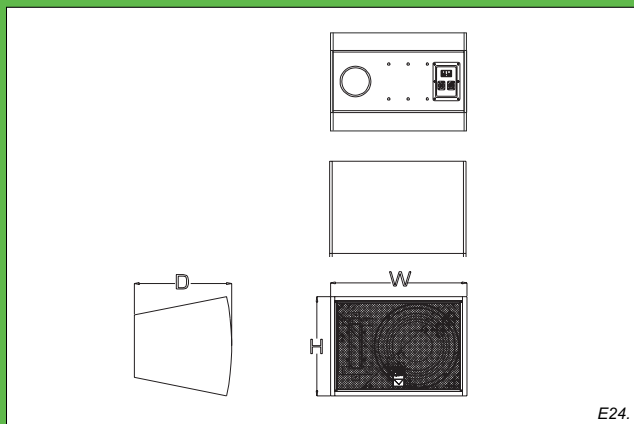

Stage Acoustic
Lagedijkerweg 13
1742 Nb Schagen
The Netherlands
Tel: +31(0)224 712 035

E-mail: info@StageAcoustic.nl

© Copyright Stage Acoustic.

The information in this document is continually being developed. Whilst every effort has been made to make it as accurate as possible, no warranty of accuracy is made or implied by the makers. Stage Acoustic shall have neither liability, nor responsibility to any person or entity with respect to loss or damages in connection with or arising from the information contained in this document.

WWW.stageacoustic.nl

We Set The Tone . . .